

ED2300 Series Exit Devices

Applications, Features, and Other Information


APPLICATIONS:

For use on a single door or double doors with or without mullion. Vertical rod (V) for use where two-point latching is desired. For 1-3/4" (44 mm) thick standard RHR or LHR hollow metal doors, and wood doors. Minimum stile width: 3-7/8" (98 mm) for rim device and 3-1/2" (89mm) for vertical rod.



The **ED2300R** is ideally suited for:

- Single exterior doors
- Single exit doors
- Pairs of Doors with Mullion
- Aluminum entrance doors
- Passage doors

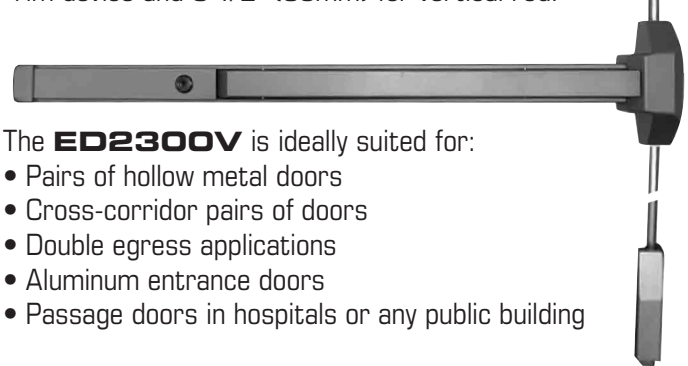

The **ED2300V** is ideally suited for:

- Pairs of hollow metal doors
- Cross-corridor pairs of doors
- Double egress applications
- Aluminum entrance doors
- Passage doors in hospitals or any public building

FEATURES:

CERTIFICATIONS: UL Listed for panic exit hardware (P) or fire exit hardware (F). A-label, 3-hours.



MATERIALS: Housing, end cap, and push bar all steel. Chassis is plated steel. Head cover is a non-ferrous alloy.

SIZES: 36" and 48"

FINISHES: 689 Sprayed Aluminum
695 Duranodic

STRIKES: ED2300R: 232 rim strike standard on ED2300R-P (with 236 shim standard) and 233 rim strike standard on ED2300R-F, double-door strike: 237.
ED2300V: 234 top strike and 235 bottom strike standard on ED2300V. Other strikes sold separately in exit device accessories section.

LATCHBOLT: ED2300R: Stainless steel, 11/16" throw
ED2300V: Stainless steel, 11/16" throw, 1/2" throw on bottom bolt

CYLINDER INFO: Rim cylinder does NOT come standard with the ED2300 Series. Please order separately.

MOUNTING: Furnished standard with machine screws and sex nuts and bolts

DOGGING: Allen-type 3/16" (hex) key dogging standard. No dogging on fire-rated devices.

WARRANTY: 1-year mechanical warranty

CYLINDERS:

Exit devices are sold less cylinder. Rim cylinders in various keyways can be found in the cylinder section. KIL trim includes 5-pin, SCH C keyway cylinder KD.

INSTALLATION HARDWARE:

Exit devices are packed with standard machine screws for flexible installation solutions.

STRIKES:

E2300 devices are furnished with high-grade, surface-mounted roller strikes. The ED2300R-P device is furnished with a shim. A double-door strike is also available for the ED2300 series. Vertical rod devices are furnished with top and bottom surface-applied strikes.

OTHER INFORMATION:

Other finishes, exit device types, and kits may be available as a special order. Please call General Lock to see if we can process your request.

All exit devices come "Exit Only". Trim is sold separately.

All devices and accessories are to be used on a 1-3/4" standard door. Please call General Lock for door thickness other than 1-3/4".

GENERAL LOCK

Quality & Value™

— Product Guide 103.1 — E:1