


# ADB and AHB Series Mortise Locks

Applications, Features, Table, Cylinders, and Installation Instructions

## APPLICATIONS:

For narrow stile glass/aluminum (storefront) door systems. Provides resistance against prying and/or parting forced entry attempts. For greater resistance against physical attack, a latch guard or full length security astragal is recommended.

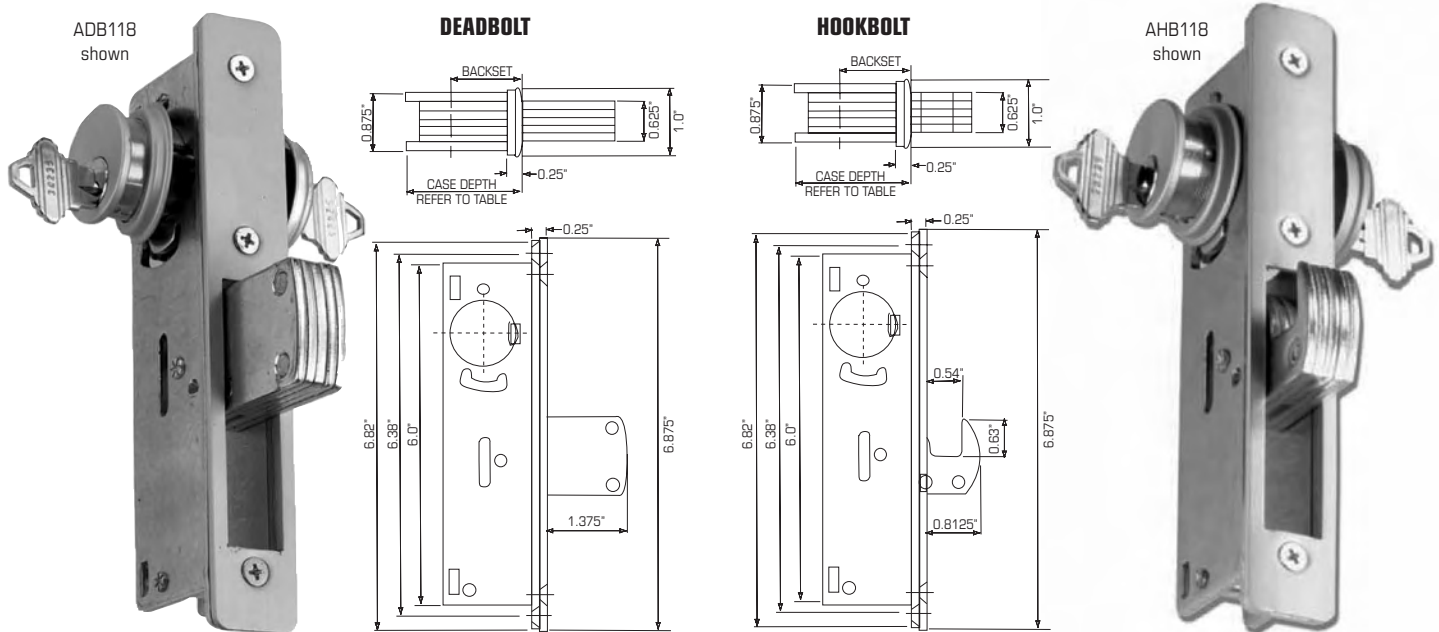

## FEATURES:

**FUNCTIONS:** Deadbolt, Hookbolt

**BACKSET:** 31/32", 1-1/8"

**HAND:** Non-handed, easily reversible

**FINISHES:** AL-aluminum, DU-duranodic

**FACE PLATE:** 1" W x 6-7/8" L  
 Supplied with 4 face plates  
 Flat aluminum / duranodic  
 Radius aluminum / duranodic

**DIMENSIONS:** Case dimensions = 7/8" W x 6" L x Depth (specific to backset)

**LATCHBOLT:** 5-ply laminated steel, hardened roller pin, center ply case hardened  
 Deadbolt - 5/8" W x 2-7/8" L x 1-3/8" throw  
 Hookbolt - 5/8" W x 1-3/8" L x 13/16" throw

## CYLINDERS:

Accepts standard 1-5/32" diameter mortise cylinder.  
 Requires MS A/R type cam.

## INSTALLATION INSTRUCTIONS:

Individually boxed with machine screws for mounting, supplied standard with four face plates. Flat-2 ea., aluminum / duranodic finish. Radius-2 ea., aluminum / duranodic finish.

More installation instructions may be available on the Internet at [www.GeneralLock.com](http://www.GeneralLock.com)

*Actual product may differ from picture shown.*

## TABLE:

FUNCTION	LOCK BACKSET	CASE DEPTH
Deadbolt	31/32" - 1-1/8"	1.63" - 1.78"
Hookbolt	31/32" - 1-1/8"	1.63" - 1.78"

**GENERAL LOCK**

Quality & Value™

— Product Guide 103.1 — | K:1 |